










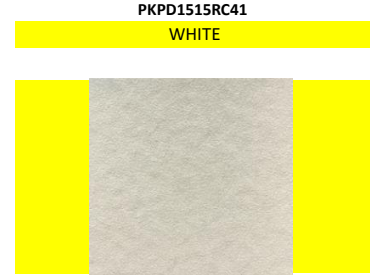






NAME OF SERIES OR ITEM NUMBER	PKPD1515RC41
MATERIAL (CERAMIC, PORCELAIN, DOUBLE LOADING, SOLUBLE SALT, SALT&PEPER, COLOR BODY)	CERAMIC
BODY (RED, WHITE , FULL BODY)	FULL BODY
VISUAL FINISH (MATT OR GLAZED, LAPATTO)(视觉上)	MATT
Producing Technique (ROTO COLOR, INJECT, SCREEN PRINTING)	SCREEN PRINTING
LAST UPDATE	2023-3-17



TECHNICAL CHARACTERISTICS CARACTERISTICAS TECNICAS		PORCELAMIKA VALUES / VALORES	NORMA ISO 13006 REQUISITOS / REQUIREMENTS PAVIMENTOS	TEST METHOD AS PER IOS NORM TEST DE ACUERDO A
	LENGTH AND WIDTH DIMENSIONES (MM)	149~151.5	±2.5%	UNI EN ISO 10545-2
	STRAIGHTNESS OF SIDE RECTITUD LATERAL (MM)	-0.17~+0.42	±0.5%	UNI EN ISO 10545-2
	RECTANGULAR SQUARENESS ORTOGONALIDAD (MM)	-0.41~+0.47	±0.6%	UNI EN ISO 10545-2
	SURFACE FLATNESS PLANARIDAD (MM)	-0.06-0.00%	±0.5%	UNI EN ISO 10545-2
	THICKNESS ESPESOR (MM)	9.9~10.1	±0.6%	UNI EN ISO 10545-2
	WATER ABSORPTION ABSORCION DE AGUA	3.8%	E ≤ 0.50 % for Porcelain 0.5% < E ≤ 3%, Gress 3% < E ≤ 6%, Semigres 6% < E ≤ 10 %, Semiporoso 10% < E ≤ 20 %, poroso (ceramic wall)	UNI EN ISO 10545-3
	BENDING RESISTANCE RESISTENCIA A LA FLEXION	29MPA	≥35Mpa for Porcelain ≥ 12 Mpa for Ceramic	UNI EN ISO 10545-4
	BREAKING STRENGTH FUERZA DE ROTURA	1951N	≥1500N for Porcelain ≥ 600 N for Ceramic	UNI EN ISO 10545-4
	CHEMICAL RESISTANCE RESISTENCIA A PRODUCTOS QUIMICOS	GA	≥ GB	UNI EN ISO 10545-14
	STAIN RESISTANCE RESISTENCIA A LA MANCHAS	4	≥3 CLASS	UNI EN ISO 10545-14
	DEEP ABRASION RESISTANCE (TECHNICAL PORCELAIN) RESISTENCIA A LA ABRASION PROFUNDA	/	<175 mm² : High Traffic <393 mm² Moderate Traffic <649 mm² Medium Traffic <393 mm² Light Traffic <393 mm² Very Light	UNI EN ISO 10545-6
	SUPERFICIAL ABRASION (PEI) (durability of tile's GLAZED surface) ABRASION SUPERFICIAL SUPERFICIES ESMALTADAS	4	PEI 1, Very light Traffic, wall Only PEI 2, Light Traffic PEI 3, Moderate Traffic, Home use Only PEI 4, Moderate to Heavy Traffic PEI 5, Heavy Traffic,	UNI EN ISO 10545-7
	SLIP RESISTANCE RESISTENCIA AL DESLIZAMIENTO	R11	R9 to R13	UNE ENV 12633
	MOHS HARDNESS SUPERFICIAL (ESCALA MOHS)	DUREZA /	MOHS 1-10	UNI EN ISO 10545-7
	SHADE VARIATION CLASS DE TONALIDAD	VARIACION V1	V1-V4	DIN 51094

PACKING INFORMATION
INFORMACION DE EMPAQUE

SIZE FORMATO	M2/BOX M2/CNT	PCS./BOX PZA./CAJA	BOX/PALLET CAJA/PALETA	M2/PALLET M2/PALETA	KG/BOX KG/CAJA	KG/PALLET KG/PALETA
150x150x10mm	0.855	38	72	61.56	17.5	1280

Se aconseja al colocar, mezclar las piezas de varias cajas. Verificar antes de colocar: tonalidad, calibre y clase. No se admiten reclamaciones referentes al material colocado.

RECOMENDACIONES

.Aconsejamos para su conservación que: una vez colocados, retiren los restos del material de colocación (cementos, etc) con una esponja y abundante agua, sin frotar sobre las piezas con ningún material abrasivo.
.En posteriores limpiezas, no utilizar nunca detergentes en polvo, soluciones ácidas o alcalinas ni estropajos abrasivos. Es suficiente una esponja, abundante agua y/o jabón líquido neutro.